

SPECIFICATION


- Light Source LED Module (Mounted)
- Light Distribution N=Narrow, M=Medium
- Body Color White(WC), Matte black(MC), Silver(SC)
- Tilt Angle 90°
- Pan Angle 360°
- Approved Driver Constant current (Sold Separately)
- Fixture Input Voltage 38.6V
- Fixture Input Current 0.7A MAX
- Weight 500g
- Attached Safety Wire

PRODUCT CODE

SL-900DF/CE/N/R27B/WC・MC・SC
 SL-900DF/CE/N/R30B/WC・MC・SC
 SL-900DF/CE/N/R35B/WC・MC・SC
 SL-900DF/CE/N/R40B/WC・MC・SC
 SL-900DF/CE/M/R27B/WC・MC・SC
 SL-900DF/CE/M/R30B/WC・MC・SC
 SL-900DF/CE/M/R35B/WC・MC・SC
 SL-900DF/CE/M/R40B/WC・MC・SC

Option (1 Piece Only)

Diffusion Lens SA-3DL03
 Wide Diffusion Lens SA-3DF01
 Spread Lens SA-3SP01
 Honeycomb Louver SA-3HC02
 Conversion Filter SA-3CV02~03
 Edge Control Filter SA-3EC01
 Sharpener (Narrow Only) SA-3SH01
 Long Snoot Adapter SA-3SN01/W, M, S

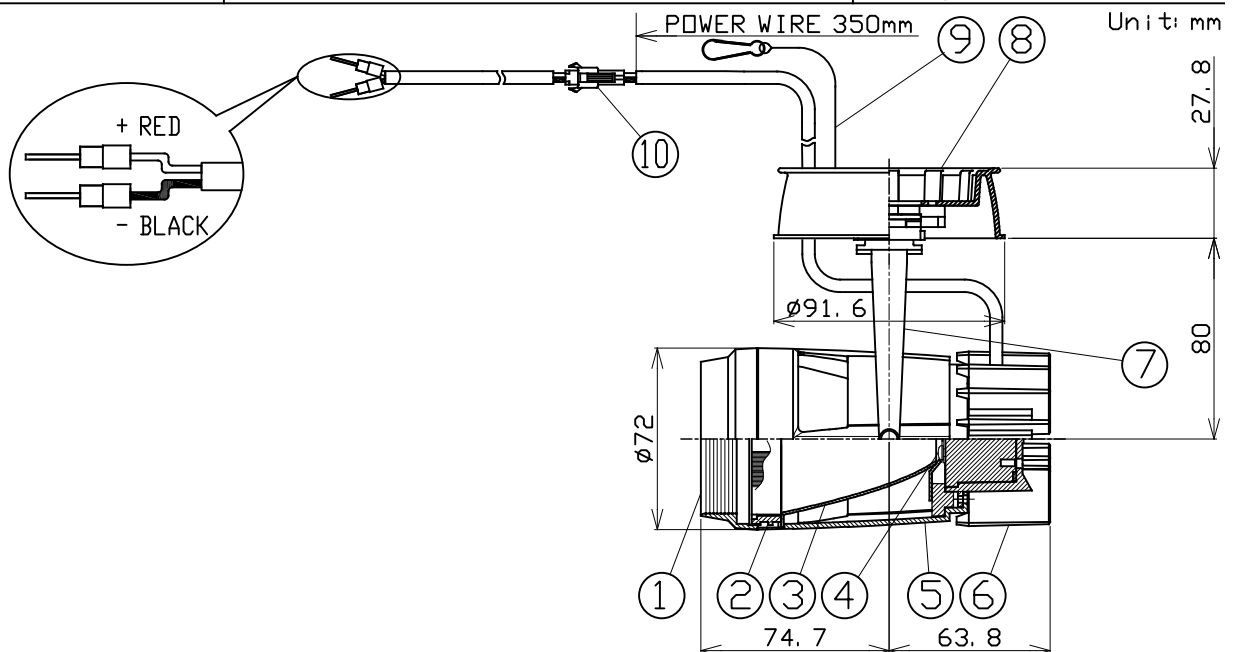

	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Unit Ring	ADC	Acrylic Baking Finish
3	Reflector	Aluminum	
4	LED Module		
5	Body	ADC	Acrylic Baking Finish
6	Socket Holder	ADC	Acrylic Baking Finish
7	Arm	Iron Plate	Acrylic Baking Finish
8	Cone	ADC	Acrylic Baking Finish
9	Safety Wire	Stainless Steel	
10	Safety Connector	Resin	

ATTENTION

- Danger ! Do not remodel fixtures.
- Emission color and brightness would be different even within the same model.
- Do not use a radio or TV near the fixtures. The unit may generate noise in the radio or TV.
- Use within 0℃~35℃ ambient temperature range.
- Do not cover fixtures with the heat insulator etc.
- Keep distance of the fixtures and objects 0.2m or more.
- Connect input-side power wire to the approved driver directly.
- Connect a safety wire to the fixture and mounting frame directly.
- Please use the constant current driver.
- Please do not remove safety connector.