



SERIES	FUNCTION	CAT. NO
ModuleX®60	FOUNDATION downlight	SX-B0155D/CE/JW/RB


	SPECIFICATION	PRODUCT CODE
	<ul style="list-style-type: none"> • Frame • Body • Dedicated Driver • Fixture Input voltage • Fixture Input current • Weight 	White(W), Matte black(M) Matte black Constant current (50/60Hz shared) 9.6V 0.48A (0.5A MAX) 75g

(mm)




Ceiling Hole Diameter

Ø60~61 For Plasterboard

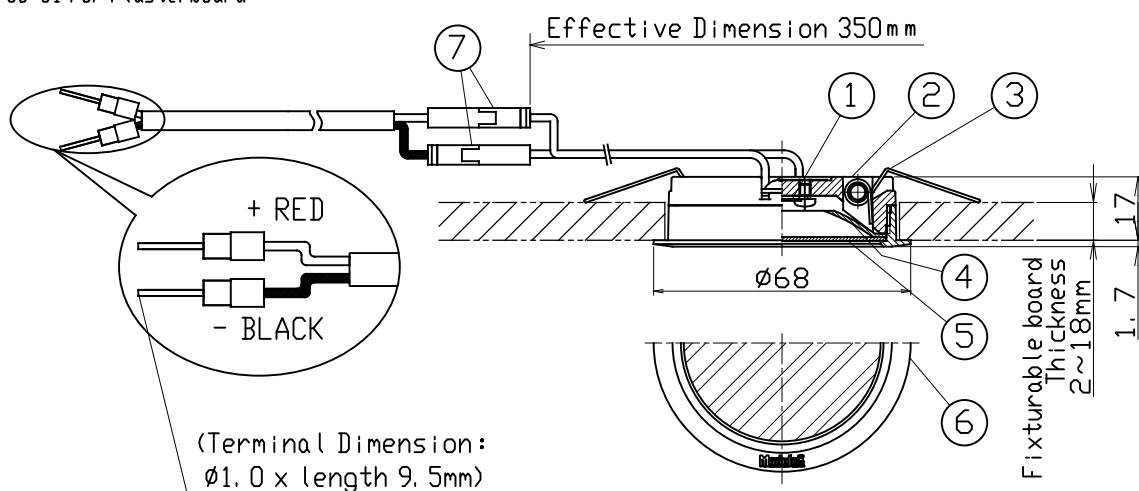

	PARTS	MATERIAL	REMARK
1	LED Unit	—	—
2	Body	ADC	Acrylic Baking Finish
3	Unit Mounting Spring	Stainless Steel	—
4	Passive Reflector	Polycarbonate	Vacuum Mealizing
5	Filter	Polycarbonate	—
6	Frame	ADC	Acrylic Baking Finish
7	Safety Connector	Resin	—

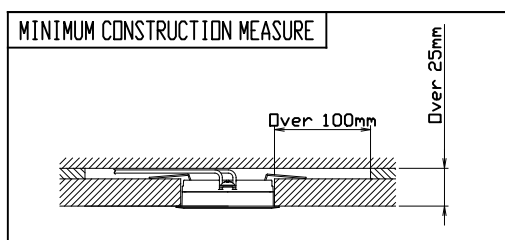

ATTENTION

- Do not cover fixtures with the heat insulator etc.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- Danger! Do not remodel fixtures.
- Use within 0t~35t ambient temperature range.
- Emission color and brightness would be different even within the same model.
- Do not cut off power wire. Use dedicated cable only for extension
- Do not touch the lens with bare hands.
- Peel off protecting sheets when in use.
- Keep distance of the fixtures and objects 0.1m or more.
- Please do not remove safety connector
- Please do not plug in the wrong electrode to the applicable driver.
It may cause shortening of LED lifetime or the damage to the LED component.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the 'class2' driver.
In that case, grounding is not required.

ModuleX® ModuleX Inc.	SPECIFICATION SHEET	SCALE 1/2	CREATED DATE 1/APR/2020	REVISION DATE 10/APR/2023
---------------------------------	---------------------	--------------	----------------------------	------------------------------