


SPECIFICATION

- Light Source LED Module (Mounted)
- Frame White(W), Matte black(M)
- Body Matte black
- Cone White cone(WC), Matte black cone(MC), Natural cone(NC)
- Dimming method 0-10V
- Input Voltage 220V±6%, 240V±6%(Dedicated driver input voltage)
- Input current 0.089A(Dedicated driver input voltage, 220V input)
0.087A(Dedicated driver input voltage, 240V input)
- Power Consumption 16.8W(Included dedicated driver, 220V input)
17.0W(Included dedicated driver, 240V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input voltage 19.5V
- Fixture Input current 0.7A
- Dimming signal input current 2mA
- Weight 360g(Includes dedicated driver)

PRODUCT CODE

- SX-B0352D/Z102/W3/R27B/WC/W
- SX-B0352D/Z102/W3/R30B/WC/W
- SX-B0352D/Z102/W3/R35B/WC/W
- SX-B0352D/Z102/W3/R40B/WC/W
- SX-B0352D/Z102/W3/R27B/MC·NC/V·M
- SX-B0352D/Z102/W3/R30B/MC·NC/V·M
- SX-B0352D/Z102/W3/R35B/MC·NC/V·M
- SX-B0352D/Z102/W3/R40B/MC·NC/V·M

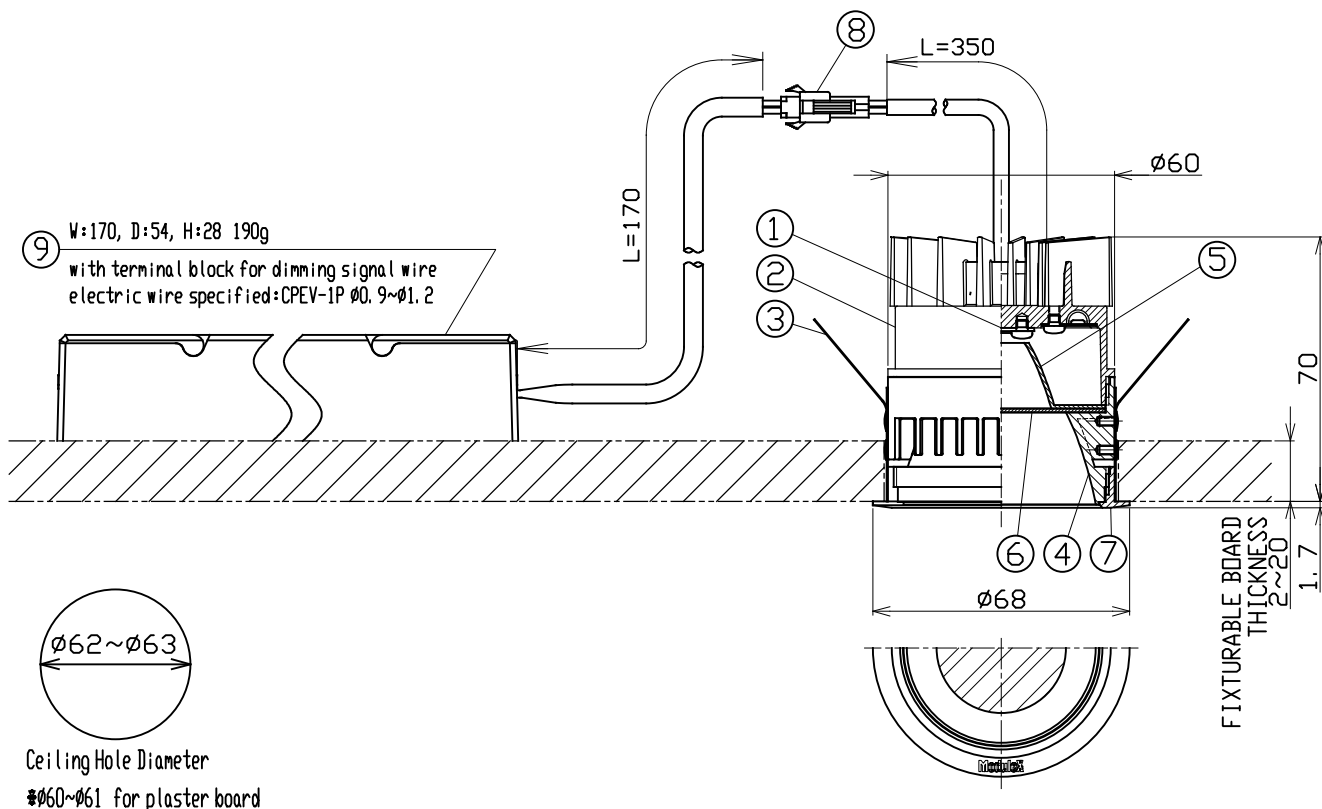

Ceiling Hole Diameter
#Ø60~Ø61 for plaster board

PARTS	MATERIAL	REMARK
1 LED Module		
2 Body	ADC	Acrylic Baking Finish
3 Unit Mounting Spring	Stainless Steel	
4 Cone	ADC	Acrylic Baking Finish(WC·MC) Plating Finish(NC)
5 Active Reflector	Aluminium	
6 Fresnel Lenz Filter	Resin	
7 Frame	ADC	Acrylic Baking Finish
8 Safety Connector	Resin	
9 Dedicated Driver	ADC	0-10V control dimming system

ATTENTION

- Do not cover fixtures with the heat insulator etc.
- Please use constant current driver.
- There is no sending terminal block on the dedicated driver (primary side).
- Connect input-side power wire to the approved driver directly.
- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range.
- Emission color and brightness would be different even within the same model.
- Do not touch the filter with bare hands.
- Keep distance of the fixtures and objects 0.1m or more.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only
- The height of inside the ceiling have to be 140mm or more to install the driver there.

