


SPECIFICATION

- Light Source LED Module(Mounted)
- Frame White(W), Matte black(M)
- Body Matte black
- Cone White Cone (WC), Matt black Cone (MC), Natural cone(NC)
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 9.6V
- Fixture Input Current 0.48A (0.5A MAX)
- Weight 140g

PRODUCT CODE

SX-B0355D/W3/R27B/WC/W/RB/CE
 SX-B0355D/W3/R30B/WC/W/RB/CE
 SX-B0355D/W3/R35B/WC/W/RB/CE
 SX-B0355D/W3/R40B/WC/W/RB/CE
 SX-B0355D/W3/R27B/MC·NC/W·M/RB/CE
 SX-B0355D/W3/R30B/MC·NC/W·M/RB/CE
 SX-B0355D/W3/R35B/MC·NC/W·M/RB/CE
 SX-B0355D/W3/R40B/MC·NC/W·M/RB/CE

(mm)

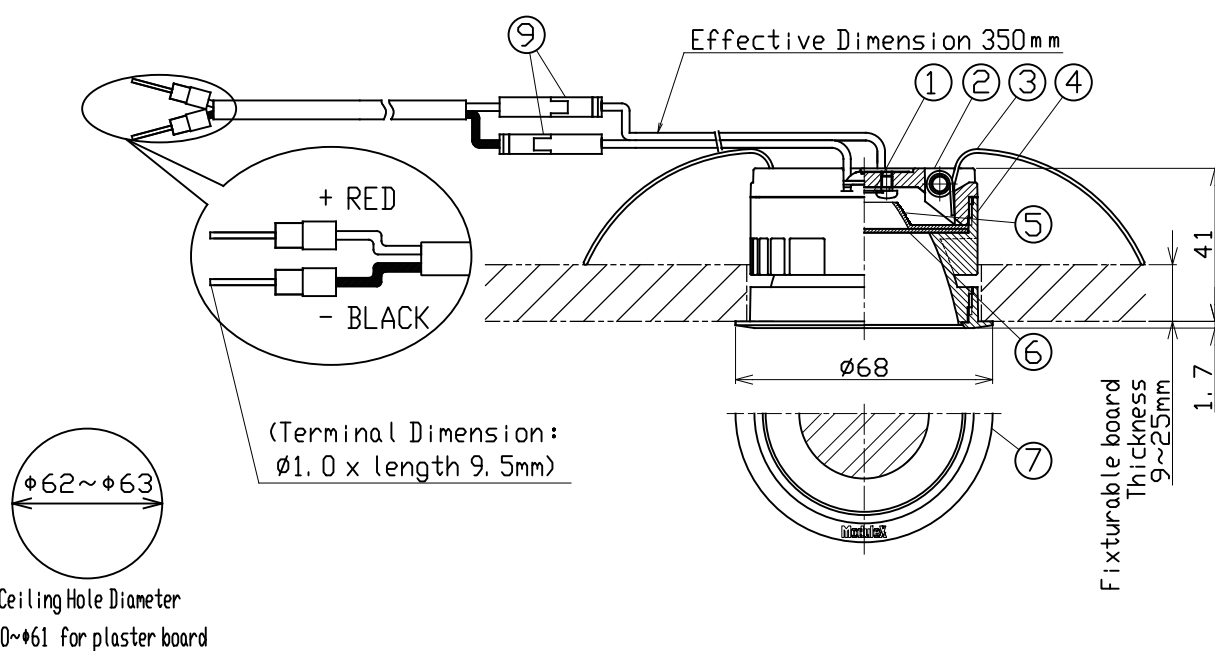

	PARTS	MATERIAL	REMARK
1	LED Module	—	—
2	Body	ADC	Acrylic Baking Finish
3	Unit Mounting Spring	Stainless Steel	—
4	Cone	ADC	Plating Finish
5	Active Reflector	Polycarbonate	Vacuum Metalizing
6	Fresnel Lenz Filter	Acrylic Resin	—
7	Frame	ADC	Acrylic Baking Finish

ATTENTION

- Do not cover fixtures with the heat insulator etc.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range.
- Emission color and brightness would be different even within the same model.
- Do not touch the filter with bare hands.
- Keep distance of the fixtures and objects 0.1m or more.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the "class2" driver.
 In that case, grounding is not required.