


SPECIFICATION

- Light Source LED Module(Mounted)
- Frame color White(W), Matte black(M)
- Cone Natural Cone
- Vertical aiming angle MAX 30°
- Horizontal aiming angle 350°
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture input voltage 9.6V
- Fixture input current 0.48A (0.5A MAX)
- Weight 160g

PRODUCT CODE

- SX-B0655H/N/R27B/NC/W·M/CE
- SX-B0655H/N/R30B/NC/W·M/CE
- SX-B0655H/N/R35B/NC/W·M/CE
- SX-B0655H/N/R40B/NC/W·M/CE

(mm)

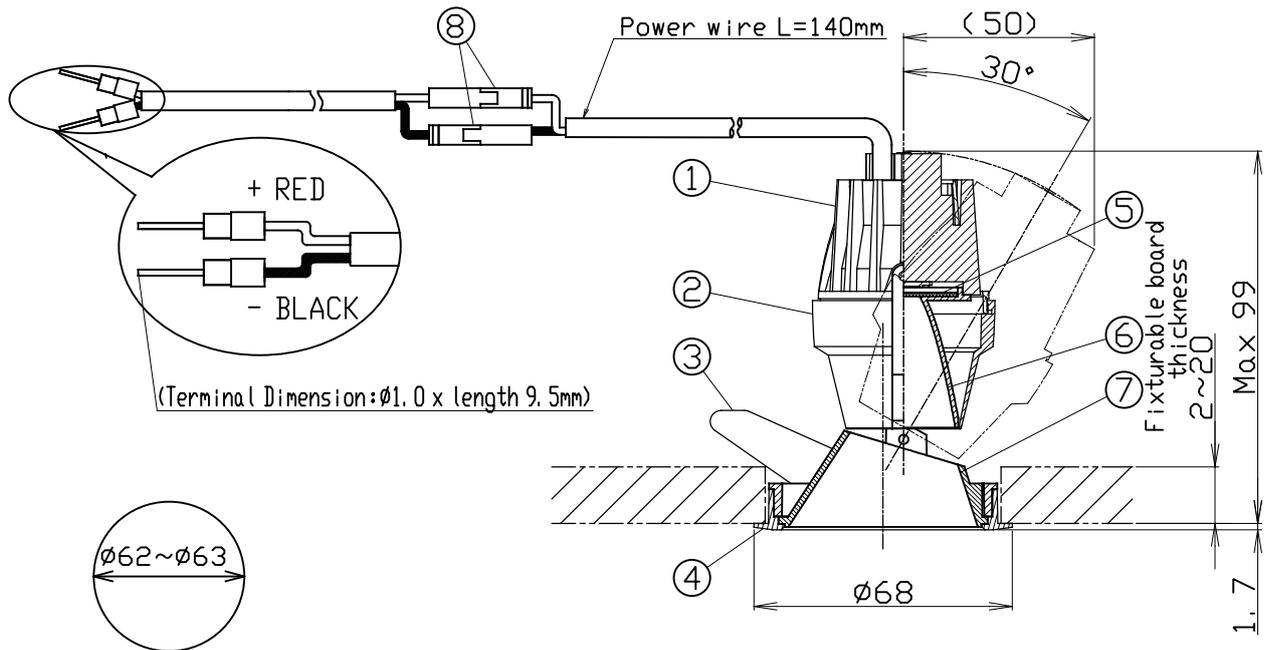

Ceiling hole diameter
 60~61 For plaster board

	PARTS	MATERIAL	REMARK
1	Body	ADC	Acrylic Baking Finish
2	Hood	ADC	Acrylic Baking Finish
3	Unit mounting spring	Stainless Steel	_____
4	Frame	ADC	Acrylic Baking Finish
5	Filter	Resin	_____
6	Active reflector	Resin	Vapor deposition
7	Cone	ADC	Plated Finish
8	Safety Connector	Resin	_____

ATTENTION

- Do not cover fixtures with the heat insulator etc.
- Please use constant current driver.
- Connect input-side power wire to the approved driver directly.
- Danger! Do not remodel fixtures.
- Use within 0℃~35℃ ambient temperature range.
- Emission color and brightness would be different even within the same model.
- Do not cut off power wire. Use dedicated cable only for extension.
- Keep distance of the fixtures and objects 0.1m or more.
- Please do not remove safety connector.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Please use the "class2" driver.
 In that case, grounding is not required.

<p>ModuleX ModuleX Inc.</p>	<p>SPECIFICATION SHEET</p>	SCALE	CREATED DATE	REVISION DATE
		1/2	1/APR/2020	