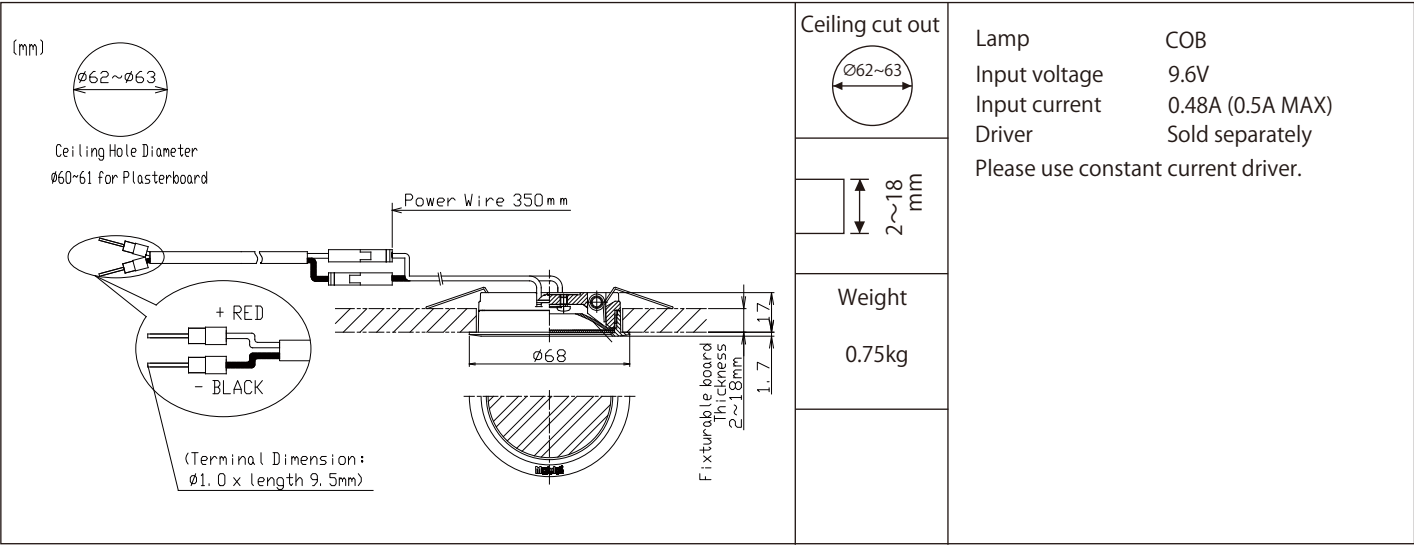

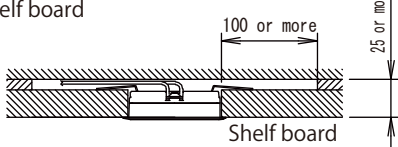
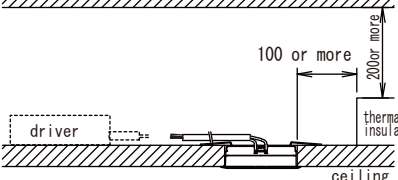


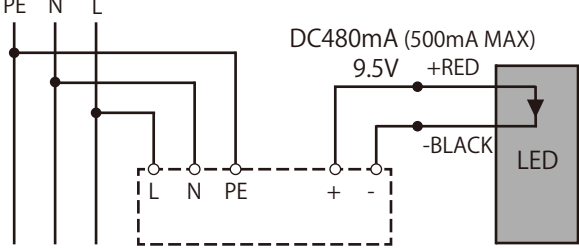



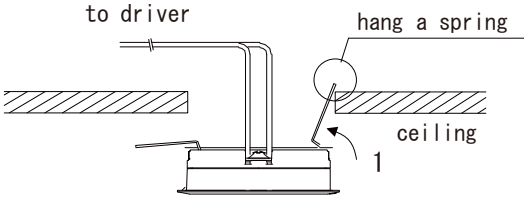
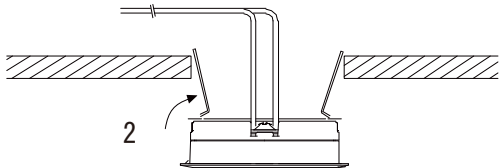
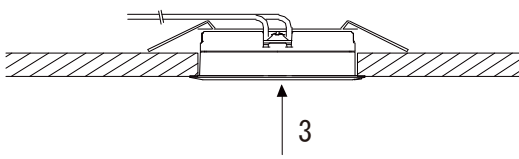




SX-B0155D/CE/RB



SX-B0155D/CE/RB

Installation Details		Installation Diagram • Caution	
1	Ceiling cut out Cut out a mounting hole.	<div>1 Cut out the ceiling</div> <div></div> <div>For plaster board Ø60</div> <div><div>• Shelf board</div><div></div></div> <div><div>• Ceiling board</div><div></div></div>	
	Make sure to have the height at least 175mm above the ceiling to install the driver.		
	Wiring connection Please connect according to the description of a power supply.	<div>Wiring diagram</div> <div></div> <div>Driver</div>	
	When connecting the driver, careful attention should be paid to connecting + and -.		
	Metal part in a cable point, please don't touch with bare hand directly.	<div>CAUTION ! Do not reverse polarity !</div> <div></div>	

Installation Details		Installation Diagram • Caution	
1	Installation to ceiling Hang an attachment spring.	<div></div>	
2	Hang the oher side spring, and into the ceiling hole.	<div></div>	
3	Attach to a ceiling side slowly.	<div></div>	
	Be careful for a fixture not to get a shock of an attachment spring. Causes of broken fixture.		
	The protection seal is stuck on the luminescence side. Please remove a seal after attachment.		