



Discontinued product LINEAR100

ModuleX

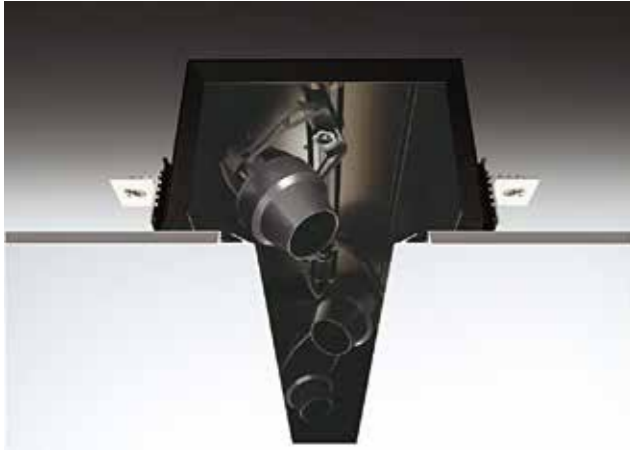


	Mounting Depth 200mm	Mounting Depth 145mm
End-Type	SX-LB102E weight: 4.0kg wide: 100 × 300	SX-LB101E weight: 3.6kg wide: 100 × 300
300	SX-LB102S/300 weight: 2.8kg wide: 100 × 300	SX-LB101S/300 weight: 2.7kg wide: 100 × 300
600	SX-LB102S/600 weight: 5.0kg wide: 100 × 600	SX-LB101S/600 weight: 4.9kg wide: 100 × 600
900	SX-LB102S/900 weight: 7.1kg wide: 100 × 900	SX-LB101S/900 weight: 7.0kg wide: 100 × 900
1200	SX-LB102S/1200 weight: 9.2kg wide: 100 × 1200	SX-LB101S/1200 weight: 9.1kg wide: 100 × 1200
Coner-Type	SX-LB102C weight: 6.0kg	SX-LB101C weight: 5.5kg
Cross-Type	SX-LB102CR weight: 9.0kg	SX-LB101CR weight: 8.4kg
T-Type	SX-LB102T weight: 7.7kg	SX-LB101T weight: 7.0kg

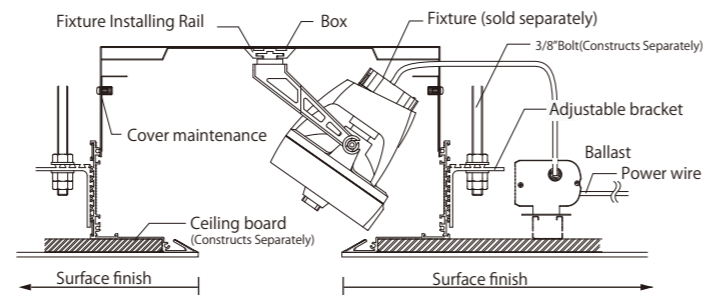

To install the fixture safely 《 Read carefully and follow all the instructions in the guide 》

<p>⚠ Warning : Failure to install the fixture properly could result in personal injury.</p> <p>⚠ Caution : Failure to install the fixture properly could result in property damage.</p>		<p>🚫 : Prohibited</p> <p>⚠ : Strict observance</p>
Before installation	<p>⚠ Warning</p> <p>🚫</p>	<p>The fixture is for indoor use only in general conditions. Can not be used following conditions (Causes of falling, electrocution and fire)</p> <ul style="list-style-type: none"> ● Inclined, uneven surface ● High humidity ● Outside ● On the floor ● Vibrated or shocked areas ● Areas get direct sunlight ● Insulated inside of ceiling ● Ceiling which can't hold the fixture weight ● On the wall ● Places affected by wind or air-conditioner machine ● Near fire ● Dusty areas, corrosive gas outbreaks areas ● Ambient temperature under 0°C and over 35°C <p>Please contact if you are not able to judge whether installation environment is suitable to the places or not.</p>
	<p>⚠ Caution</p> <p>⚠</p>	<p>Please follow the fixtures' indication or specification for the distance of irradiated area. (Causes of change in shape, change in color of irradiated objects)</p>
At lighting fixture installation	<p>⚠ Warning</p> <p>⚠</p> <p>🚫</p>	<p>Please follow the fixtures' instruction or this guide to install the fixture and lamp. (Causes of falling • electrification • fire)</p> <p>Make sure to install all the parts of fixtures besides installation and mounting parts will not touch with any objects both inside and outside of ceiling such as lighting track, etc. (Causes of falling • electrification • fire)</p> <p>Do not dismantle or remodel fixtures. (Cause of electrification • fire • falling • broken fixtures)</p>
	<p>⚠ Caution</p> <p>⚠</p>	<p>Make sure the construction will not affect any fire prevention systems such as sprinkler by heat from the fixture. (Causes for improper operation)</p>

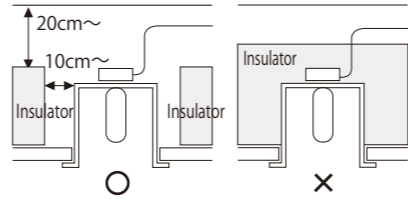

Installation Details	Installation Diagram	Caution
<p>1 Attachment to a ceiling</p> <p>1 Slide the adjustable bracket to the side of the box to install</p> <p>2 Place the channel and the bar on the box</p> <p>⚠️ a Be careful of the position of the adjustable bracket. Adjust it according to the thickness of the ceiling board as per the drawing (Bracket has sticker A indicated). In case its installed incorrectly it may effect the construction to the ceiling or the fixture might fall off</p> <p>With board thickness of 9.5mm and 9.5mm×2 there will be 3mm gap between the box. Please make adjustments with the material</p>		<p>⚠️ a</p> <p>Fill in the 3mm gap with material</p> <p>The slide of a bracket</p> <p>B : Able to slide it to any place A : LINEAR100 : 365mm LINEAR150 : 405mm</p>
<p>3 Slide the attaching clasp and insert securely. Please secure 4 places on both sides with a screw</p> <p>4 Slide the bracket to the precise area and secure with anchor bolt</p> <p>5 Slide the fixture to the rail within the box and install (Please refer to the Fixture Install Guide)</p> <p>6 Connect the wires to the fixture (Please refer to the Fixture Install Guide)</p>		<p>3</p> <p>Connection Metal fitting</p> <p>4</p>

Installation Details	Installation Diagram	Caution
<p>Ceiling finish</p> <p>1 Butter muslin is stuck</p> <p>2 Finish the seam with putty</p> <p>3 Paint</p> <p>⚠️ b When constructing, make sure the putty is securely finished and there will be no crack</p> <p>⚠️ c Make sure there will be no ceiling paint on the opening of the box</p>		<p>⚠️ To Ceiling Constructors Please pay attention.</p> <p>1 2 3</p> <p>Butter muslin is stuck Finish the seam with putty Paint</p> <p>Box Ceiling board Undercoat putty Butter muslin Putty Paint</p> <p>⚠️ b</p> <p>⚠️ c</p>

(Contact)

Concord Lighting

5/F, Longbow House, 14-20 Chiswell Street, London, EC1Y 4TW, UK
Tel : +44-01273-616649

(Manufacturer)

ModuleX Inc.

#21 AraiBldg, 1-20-6 Ebisu-Minami Shibuya-ku, Tokyo
Tel : +81-3-5768-3131