

SPECIFICATION



- Light Source LED Module (Mounted)
- Light Distribution N=Narrow, M=Medium
- Cone White Cone(WC)
Matt black Cone(MC)
Chrome Cone(CC)
- Frame White(SWF), Matt black(SMF)
- Approved Driver Constant current (Sold separately)
- Fixture Input Voltage 36.8V
- Fixture Input Current 1.2A MAX
- Weight 1.1kg
- Attached Safety Wire
- Tool for tilt lock is equipped

PRODUCT CODE

- MMP-130A/WC/SWF/N·M/40B27/DL/3
- MMP-130A/WC/SWF/N·M/40B30/DL/3
- MMP-130A/WC/SWF/N·M/40B35/DL/3
- MMP-130A/WC/SWF/N·M/40B40/DL/3
- MMP-130A/MC/SWF·SMF/N·M/40B27/DL/3
- MMP-130A/MC/SWF·SMF/N·M/40B30/DL/3
- MMP-130A/MC/SWF·SMF/N·M/40B35/DL/3
- MMP-130A/MC/SWF·SMF/N·M/40B40/DL/3
- MMP-130A/CC/SWF·SMF/N·M/40B27/DL/3
- MMP-130A/CC/SWF·SMF/N·M/40B30/DL/3
- MMP-130A/CC/SWF·SMF/N·M/40B35/DL/3
- MMP-130A/CC/SWF·SMF/N·M/40B40/DL/3

OPTION

- Full Spread Lens Filter MLA-130/SF01
- Semi Spread Lens Filter MLA-130/SS01
- Full Diffuser Lens Filter MLA-130/DF01
- Semi Diffuser Lens Filter MLA-130/DS02
- Sharpener Lens MLA-130/SH01
- (available only for narrow distribution)
- Edge Control Lens Filters MLA-130/EC02

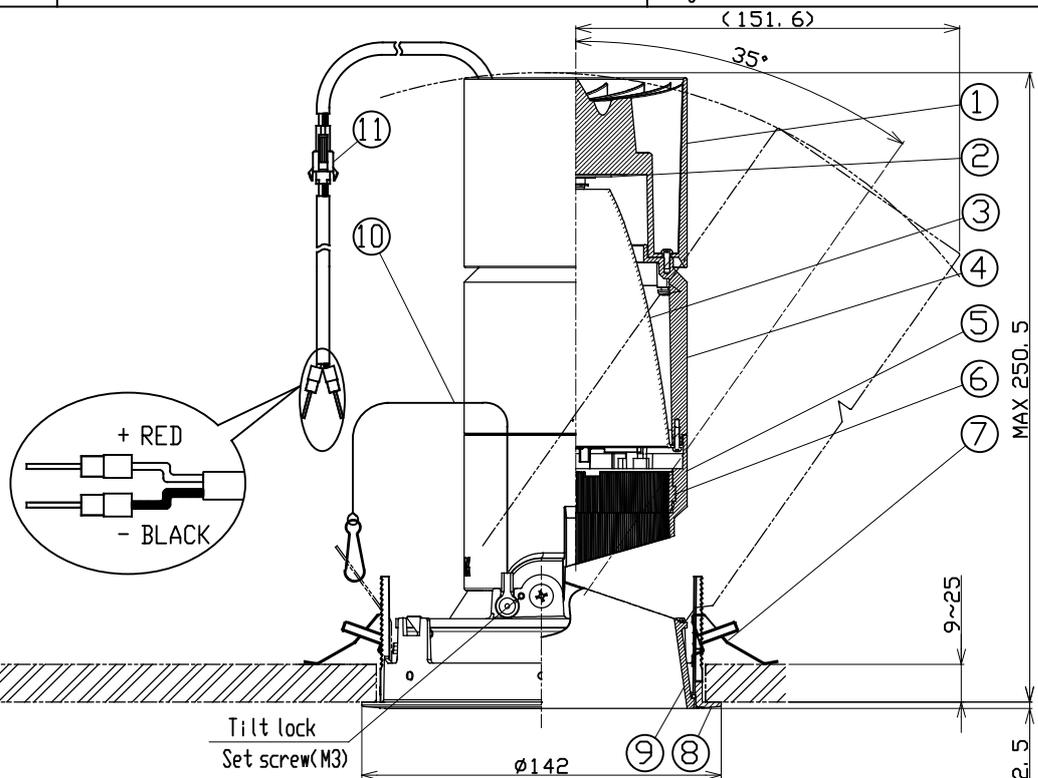

PARTS	MATERIAL	REMARK
1 Socket Holder	ADC	Acrylic Baking Finish
2 LED Module		
3 Reflector	Aluminum	
4 Body	ADC	Acrylic Baking Finish
5 Hood	ADC	Acrylic Baking Finish
6 Option Holder	ADC	Acrylic Baking Finish
7 Unit Mounting Spring	Stainless Steel	
8 Mounting Frame	ADC	Acrylic Baking Finish
9 Cone	ADC	Acrylic Baking Finish(WC·MC) Plating Finish(CC)
10 Safety Wire	Stainless Steel	
11 Safety Connector	Resin	

ATTENTION

- Do not cover fixtures with the heat insulator etc.
- Connect input-side power wire to the approved driver directly.
- Use within 0~35°C ambient temperature range.
- Emission color and brightness would be different even within the same model.
- Please do not unfasten the set crew for tilt lock too much. Otherwise, it may be dropped and lost.
- This equipment is a ceiling installation exclusive equipment. It can not be mounted on an inclined ceiling or wall.
- Tilt scales may cause manufacturing angular errors. Please use as a guide.
- Even if this product is used indoors, do not use the fixture near places where there would be anything that contains sulfur. (Some foods, medicines, paper products, rubber products and exhaust gas from vehicles may contain sulfur.)
- Please use constant current driver.
- Danger! Do not remodel fixtures.
- Connect a safety wire to the fixture and mounting frame directly.
- Keep distance of the fixtures and objects 0.3m or more.
- Please do not remove safety connector.
- Please do not plug in the wrong electrode to the applicable driver. It may cause shortening of LED lifetime or the damage to the LED component.
- Tilt lock please be done before attaching to the frame.