

SPECIFICATION


- Light Source LED Module (Mounted)
- Body White(WCL), Matte black(MCL), Silver(SCL)
- Light Distribution Narrow(N), Medium(M)
- Vertical aiming angle Upper10°, Lower90°
- Horizontal aiming angle 360°
- Dimming method 0-10V
- Input Voltage 220V±6%, 240V±6% (Dedicated driver input voltage)
- Input current 0.237A (Dedicated driver input voltage, 220V input)
0.217A (Dedicated driver input voltage, 240V input)
- Power Consumption 49.0V (Included dedicated driver, 200V input)
49.2V (Included dedicated driver, 242V input)
- *The power consumption is measured based on the measuring method, JIS C 8105-3.
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input voltage 36.8V
- Fixture Input current 1.2A
- Dimming signal input current 2mA
- Weight 1.4kg (Included dedicated driver)
- Safety Wire is attached
- tool for tilt lock is equipped

PRODUCT CODE



- MMP-130D/1H/WCL/N・M/40B27/Z2/3
- MMP-130D/1H/WCL/N・M/40B30/Z2/3
- MMP-130D/1H/WCL/N・M/40B35/Z2/3
- MMP-130D/1H/WCL/N・M/40B40/Z2/3
- MMP-130D/1H/MCL/N・M/40B27/Z2/3
- MMP-130D/1H/MCL/N・M/40B30/Z2/3
- MMP-130D/1H/MCL/N・M/40B35/Z2/3
- MMP-130D/1H/MCL/N・M/40B40/Z2/3
- MMP-130D/1H/SCL/N・M/40B27/Z2/3
- MMP-130D/1H/SCL/N・M/40B30/Z2/3
- MMP-130D/1H/SCL/N・M/40B35/Z2/3
- MMP-130D/1H/SCL/N・M/40B40/Z2/3

OPTION

- Full Diffuser Lens Filter MLA-130/DF01
 - Semi Diffuser Lens Filter MLA-130/DS02
 - Full Spread Lens Filter MLA-130/SF01
 - Semi Spread Lens Filter MLA-130/SS01
 - Edge Control Lens Filters MLA-130/ECO2
 - Sharpener Lens MLA-130/SH01
- (available only for narrow distribution)

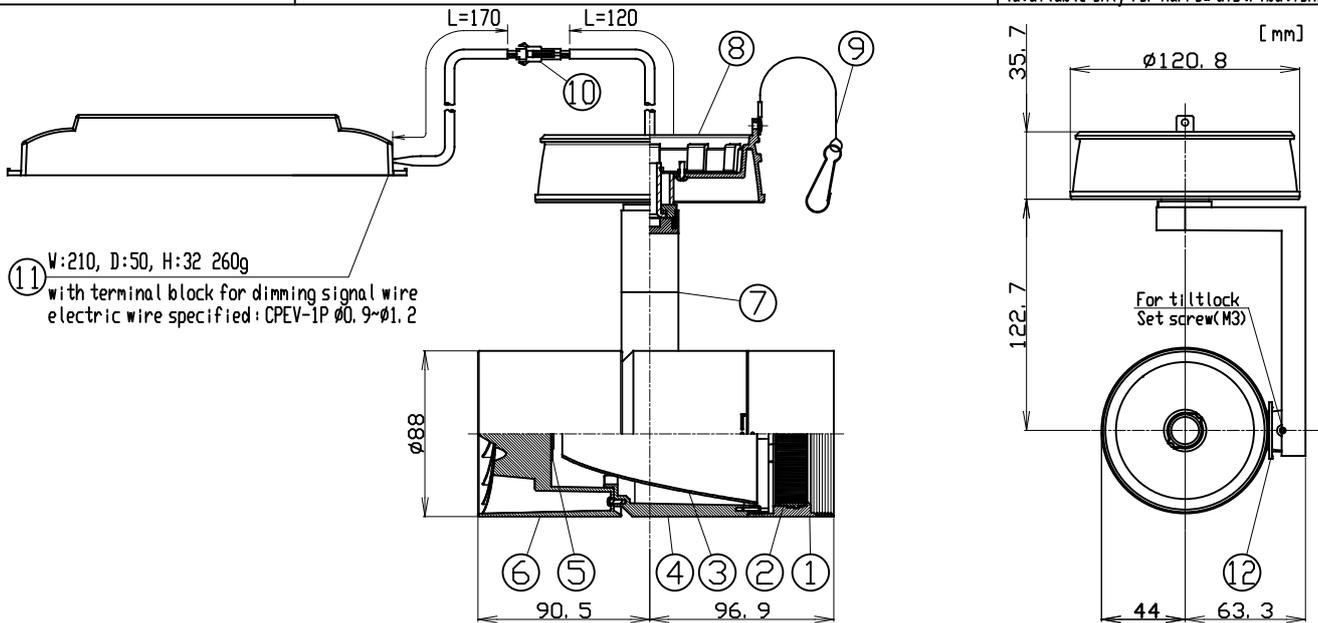

PARTS	MATERIAL	REMARK
1 Hood	ADC	Acrylic Baking Finish
2 Option Holder	ADC	Acrylic Baking Finish
3 Reflector	Aluminum	
4 Body	ADC	Acrylic Baking Finish
5 LED Module		
6 Socket Holder	ADC	Acrylic Baking Finish
7 Arm	ADC	Acrylic Baking Finish
8 Cone	ADC	Acrylic Baking Finish
9 Safety Wire		
10 Safety Connector	Resin	
11 Dedicated Driver		0-10V control dimming system
12 Tilt Protractor	Resin	

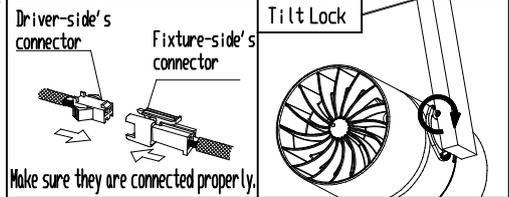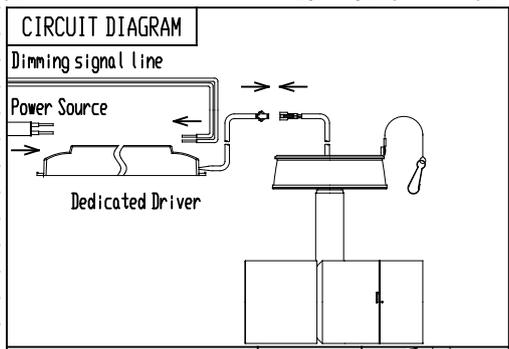

- ATTENTION!**
- Emission color and brightness would be different even within the same model.
 - Do not use a radio or TV near the fixtures. The unit may generate noise in the radio or TV.
 - Danger! Do not remodel fixtures.
 - Use the dedicated driver only.
 - There is no sending terminal block on the dedicated driver (primary side).
 - Connect input-side power wire to the dedicated driver directly.
 - Calculate the capacity in accordance with JIS C8155 standard.
 - Use 0-10V control dimming system (SR-2830AS-1-10V(Sold separately)) only
 - Keep distance of the fixtures and objects 0.3m or more.
 - Use within 0°C~35°C ambient temperature range.
 - Please do not move the fixture body under the situation the pan/tilt lock works.

- Please do not unfasten the set crew for tilt lock too much. Otherwise, it may be dropped and lost.
- Be sure to connect a safety wire to the fixture and mounting frame.
- The fixture is ceiling mounting exclusive use. Do not mount inclined ceilings or walls.
- Do not cover the fixture with a heat insulator etc.