
Installation Guide | Lighting Fixture

MUSEUM PLATFORM

Adjustable downlight

MMP-100A/20A/S1/DL/3



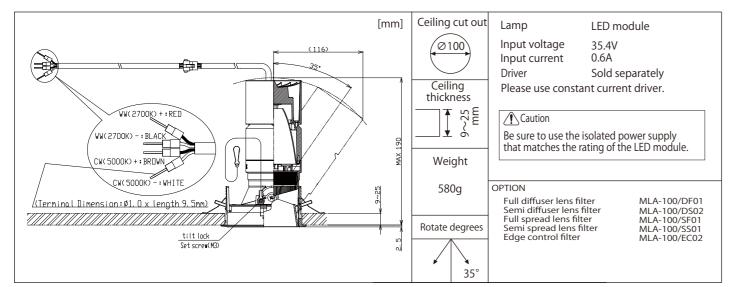

TOKYO

#21 AraiBldg, 1-20-6 Ebisu-Minami Shibuya-ku, Tokyo, 150-0022, Japan Tel +81-3-5768-3681 OSAKA

3-3-9 Kyutaromachi Chuo-ku Osaka-shi, Osaka 541-0056, Japan Tel +81-3-6261-7888

I FLIKLIOKA

CREATED DATE 09. Feb, 2024

1-8-30-1 Daimyo, Chuo-ku, Fukuoka 810-0041, Japan Tel +81-92-732-4211

ModuleX

Installation Guide

Lighting Fixture

MMP-100A/20A/S1/DL/3

To install the fixture safely ${ m \leqslant }$ Read carefully and follow all the ${ m \; instructions \; in \; the \; guide \; angle }$							
	g : Failure to	install	the fixture properly could result in persona l injury.				
⚠ Caution : Failure to install the fixture properly could result in property damage.							
Before installation	⚠ Warning	0	The fixture is for indoor use only in general conditions. This fixture can only be installed on a horizontal ceiling. Can not be used following conditions (Causes of falling, electrocution and fire) On the wall On the wall On the floor Outside Ambient temperature under 0°C and over 35°C Near fire Ceiling which can't hold the fixture weight High humidity Dusty areas, corrosive gas outbreaks areas Areas get direct sunlight Vibrated or shocked areas Please contact if you are not able to judge whether installation environment is suitable to the places or not.				
	↑ Caution	0	Even when using it indoors, do not use it in a place where there is a sulfur component around the equipment. (Sulfur components may also be contained in some foods, chemicals, papers, rubber products, and car exhaust gas.)				
		0	Please follow the fixtures' indication or specification for the distance of irradiated area. (Causes of change in shape, change in color of irradiated objects)				
		0	Carefully check the size of the lighting fixtures and secure sufficient space in the ceiling.				
For electric	↑ Warning	0	Only qualified person may work on electric wiring and equipment.(Cause of accidents)				
wiring		0	Please use a compatible power supply and compatible driver. (Cause of non-lighting / fire)				
		0	Be sure power supply voltage is within $\pm 6\%$ mentioned in rating plate or the guide. (Causes of short life of lamps • electrification • fire)				
		0	Be sure all the wires and codes are not damaged. (Causes of falling•damage)				
		0	Do not perform live-line construction. There is a risk of electric shock or product failure.				
		0	Do not install other electronic devices (devices that use a motor such as a ventilation fan) in the same circuit as it may lead to equipment failure.				
At lighting fixture	⚠ Warning	0	Please follow the fixtures' instruction or this guide to installthe fixture and lamp. (Causes of falling electrification fire)				
installation		0	Models equipped with a safety wire (fall prevention wire) as standard equipment to prevent falling due to an earthquake, etc. Be sure to install it securely according to this manual.				
		0	Be sure to turn off the power when installing the fixture or lamp. (Cause of electric shock)				
		0	Do not touch the fixture when switch is on or just turn off the switch because of high temperature.				
		\Diamond	Do not put or cover the fixture by any cloths, papers, or insulators.(Causes of not lighting • fire)				
		0	Do not put metal or burning objects in the gaps of the equipment. (Causes of electric shock, fire, and equipment failure)				
		0	Make sure that the outer shell of the main body other than the equipment mounting part does not come into contact with equipment such as construction materials and ducts inside and outside the ceiling. (Causes of falling, electric shock, and fire)				
Do not dismount or remodel fixtures. (Cause of electrification • fire • falling •		Do not dismount or remodel fixtures. (Cause of electrification • fire • falling • broken fixtures)					
	Do not operate with wet hands.		Do not operate with wet hands.				
		0	Do not grab and lift wires or cables that are not the product itself. It may be damaged.				
		0	If you smell smoke, see smoke, or find anything unusual, please turn the switch off and ask construction companies to repair. (Cause of electrification • fire)				
	<u>(</u> Caution	0	Use protective equipment such as clean gloves when installing and removing equipment. (Cause of injury)				
		0	Install so that the heat of the equipment does not affect the fire protection equipment such as sprinklers. (Cause of malfunction)				
		0	Please note that noise may enter the device if it is lit near a communication device such as a radio.				


Installation Guide | Lighting Fixture


MUSEUM PLATFORM | Adjustable downlight

MMP-100A/20A/S1/DL/3

	Installation Details	Installation Diagram • Caution		
1 2 3	Install the mounting equipment for ceiling cut out Cut out a hole and install the mounting frame. Slide the metal fittings from upper side. Use a screw driver and tighten the metal fittings.	1 Ceiling cut out Mounting f	frame 2 Push tight	
∴ a	On step 2, please fix the metal fitting firmly with your fingers. If not, it may cause falling of fixtures. Make sure to tighten the metal fittings securely with a screwdriver. (torque 1.0 ~2.0 N • m) If it is loose, it may cause falling of the fixture.	Metal fitting	Standard to screw torque 1.0~2.0N·m	
1 2 3 4 5	Optional parts installation Turn around the body. Pull out the body from the hood. Turn around the option holder, and put out. Put a filter in hood. Turn around the option holder, and put in.	Body Hood Option holder Filter 4	Up to 2Filters Coption holder X	
\mathbb{T}_{c}	Don't put in the filters than the rule number of pieces. Align the markings of the hood and the body, please turn it clockwise until it clicks.	Inner Hood	Attach the body and hood by aligning them with the markers above. Slide to lock	

To install ModuleX safety Installation Details Installation Diagram • Caution Tilting angle setting 1 Please regulate a point of view The tilt memory may have an angular to a scale. error due to its structure. Please use it as a guide. Please tighten a screw by the hexagonal wrench, and lock. Be sure to use the supplied hexagonal wrench (M1.5) when setting the illumination angle of the light fixture. hexagonal wrench Also, be sure to release the tilt/pan lock before doing so. Keep the hexagonal wrench in a safe DC36.4V 900mA MAX +BROWN Wiring diagram Wiring connection PE N L Please connect according to the description of a power supply. -WHITE +RED

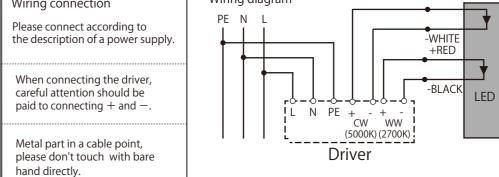

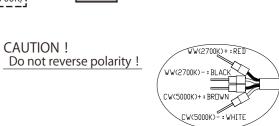

Installation to ceiling

- 1 Install the safety wire to the mounting frame.
- 2 Install the fixture to the mounting frame.
- Make sure to install the safety wire to the mounting frame securely.
- Use clean soft cloth to clean up and maintain inner side of the body.
- Make sure the fixture will not touch any objects in ceiling.

