

ModuleX Filter lighting Options Installation guide


To install ModuleX safety

Read the instructions carefully before installation and commissioning! If you have found a defect of or have any questions product, please stop the construction. Please contact your dealer.

Leave the instructions for users/customers for future reference!

Mountable models R9651H 910CBP 400LDF/V2 400CBPC/V2 900DF 900LE 410LDF/V2 410CBPC/V2 SL-400DFC/V2 910DF 910LE 400CBP/V2 900CBP B4651H 410CBP/V2 400LE/V2

Lens filter				
SA-3DL03	SA-3DF01	SA-3SP01	SA-3HC02	SA-3EC01
Diffusion lens	Wide-diffusion lens	Spread lens	Honeycomb louver	Edge control
A concave surface to the light source side	A concave surface to the light source side	A concave surface to the light source side		Sandblasting is in the direction of the scalloped image
SA-3CV02 Color temperature UP 500K	SA-3CV03 Color temperature DOWN 450K			
A concave surface to the light source side	A concave surface to the light source side			

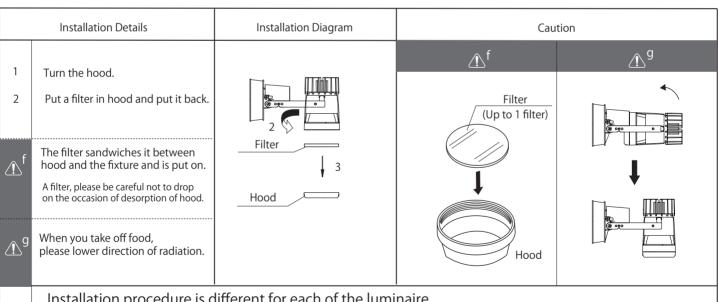

Installation procedure is different for each of the luminaire. The actual installation, follow the user's manual for the appropriate lighting fixtures.

⚠ Caution

- Before carrying out maintenance and installation on the luminaire, disconnect from the mains supply.
- It can not be used for non-mountable models.
- There is a risk of injury at the edge part of the product. Please enough attention to handling.
- · Please be securely attached. Failure to observe this may cause the part of the luminaire to fall.
- · Please do not disassemble or modify the product.
- Avoid use and storage in the moisture and humid environment.

(Contact)

Concord Lighting

5/F, Longbow House,14-20 Chiswell Street, London, EC1Y 4TW, UK Tel: +44-01273-616649

(Manufacturer)

ModuleX Inc.

#21 AraiBldg, 1-20-6 Ebisu-Minami Shibuya-ku, Tokyo Tel:+81-3-5768-3131