

SERIES


ModuleX®130

FUNCTION

Wall Washer downlight

CAT, No.

SX-B4456D/CE




SPECIFICATION

- Mounting Frame White, Matte black
- Cone White Cone(WC), Matte black Cone(MC)
Natural Cone(NC)
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 73, 6V
- Fixture Input Current 0, 7A (MAX)
- Weight 1, 2Kg
- Attached Safety Wire

PRODUCT CODE

SX-B4456D/R27B/WC/W/CE
 SX-B4456D/R27B/MC/W·M/CE
 SX-B4456D/R27B/NC/W·M/CE
 SX-B4456D/R30B/WC/W/CE
 SX-B4456D/R30B/MC/W·M/CE
 SX-B4456D/R30B/NC/W·M/CE
 SX-B4456D/R35B/WC/W/CE
 SX-B4456D/R35B/MC/W·M/CE
 SX-B4456D/R35B/NC/W·M/CE
 SX-B4456D/R40B/WC/W/CE
 SX-B4456D/R40B/MC/W·M/CE
 SX-B4456D/R40B/NC/W·M/CE

(mm)

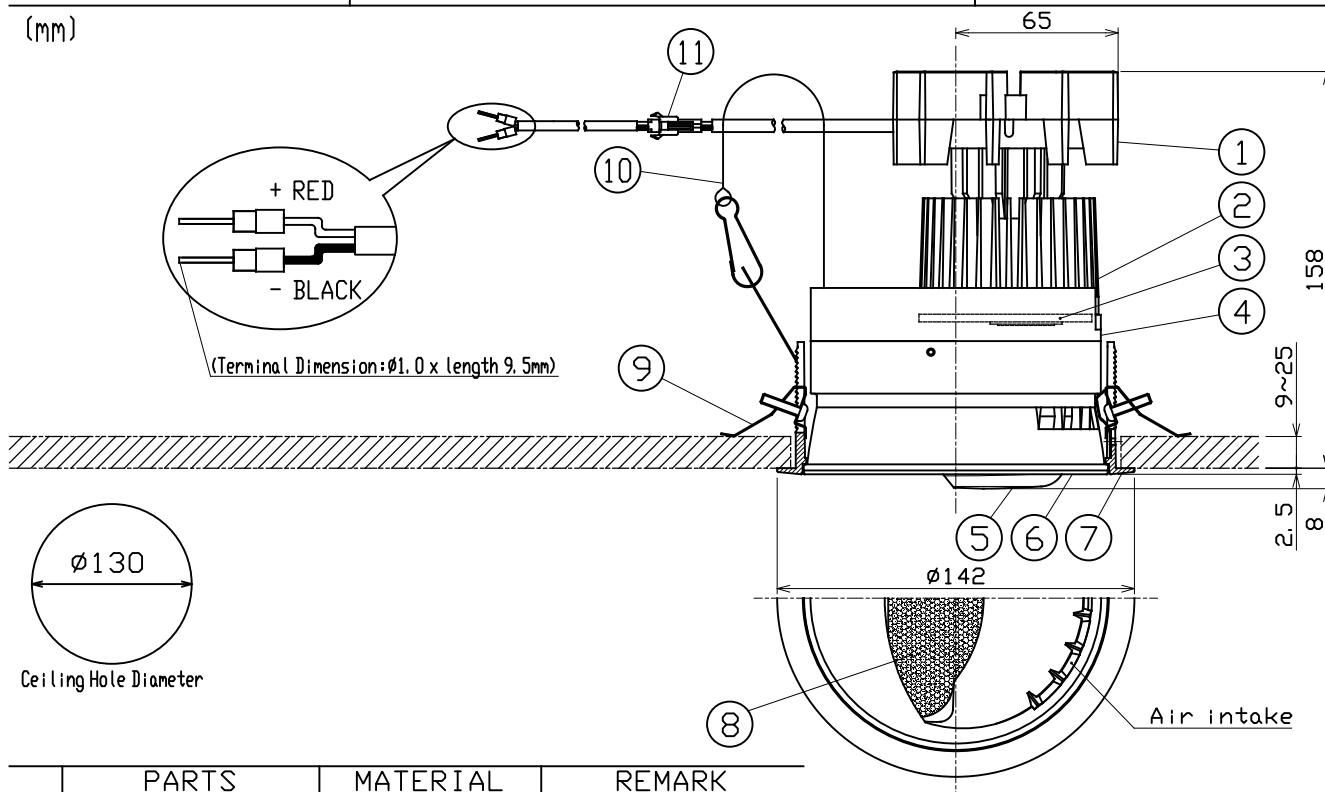

	PARTS	MATERIAL	REMARK
1	Socket Holder	ADC	Heat Resistance Black Coating
2	LCL Fixture	ADC	Heat Resistance Black Coating
3	LED Module	_____	_____
4	Ring Adapter	ADC	Heat Resistance Black Coating
5	Cone Cover	ADC	WC, MC:Acrylic Baking Finish NC :Plating Finish
6	Cone	ADC	WC, MC:Acrylic Baking Finish NC :Plating Finish
7	Mounting Frame	ADC	Acrylic Baking Finish
8	Lens Filter	Hard Glass	Shot Processing
9	Unit Mounting Spring	Stainless Steel	_____
10	Safety Wire	Stainless Steel	_____
11	Safety connector	Resin	_____

ATTENTION

- Use within 0t~35t ambient temperature range
- Do not cover fixtures with the heat insulator etc.
- Connect a safety wire to the fixture and mounting frame directly.
- Emission color and brightness would be different even within the same model.
- Keep distance of the fixtures and objects 0.1m or more.
- Danger! Do not remodel fixtures.
- Connect input-side power wire to the approved driver directly.
- Please use constant current driver.
- Please use the "class2" driver. In that case, grounding is not required.

ModuleX
ModuleX Inc.

SPECIFICATION SHEET

SCALE
1 / 3

CREATED DATE
1/APR/2020

REVISION DATE