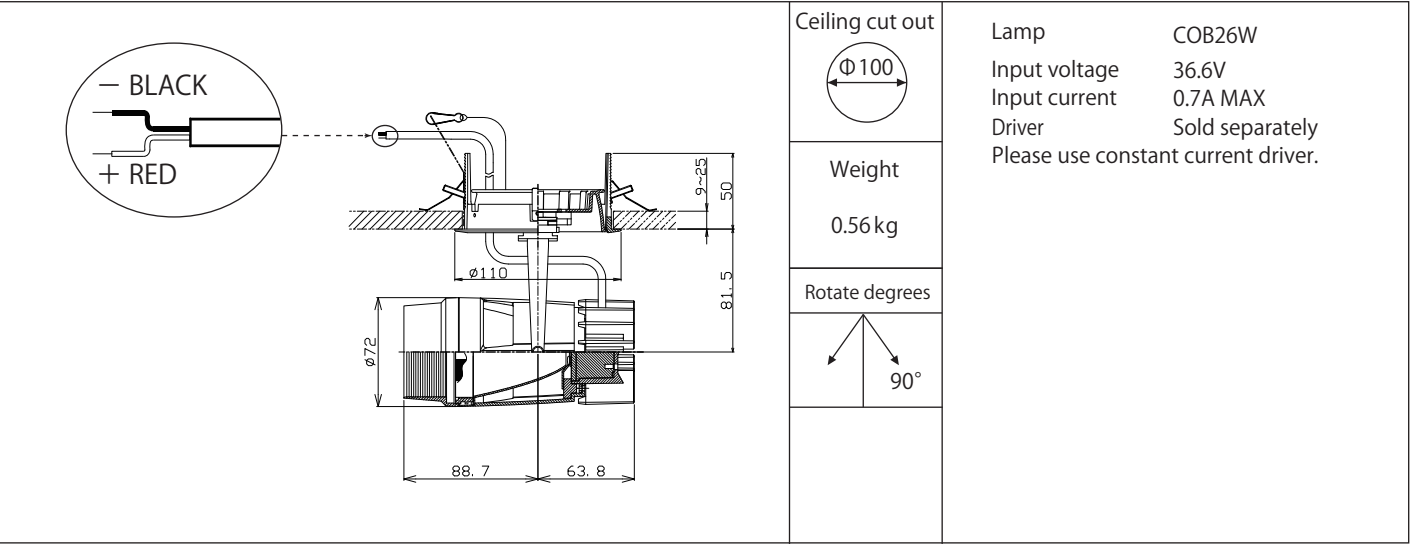



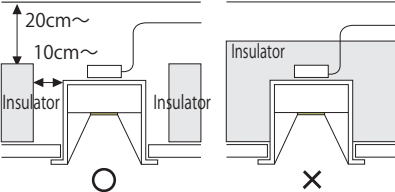





















SX-910DF/CE



To install the fixture safely 《 Read carefully and follow all the instructions in the guide 》		
	 Warning	Failure to install the fixture properly could result in personal injury.
	 Caution	Failure to install the fixture properly could result in property damage.
Before installation	 Warning	<div>The fixture is for indoor use only in general conditions. Can not be used following conditions (Causes of falling, electrocution and fire) ●Inclined, uneven surface ●Insulated inside of ceiling ●Ambient temperature under 0°C and over 35°C ●High humidity ●Ceiling which can't hold the fixture weight ●Outside ●On the wall ●On the floor ●Places affected by wind or air-conditioner machine ●Vibrated or shocked areas ●Near fire ●Areas get direct sunlight ●Dusty areas, corrosive gas outbreaks areas Please contact if you are not able to judge whether installation environment is suitable to the places or not.</div> <div></div>
	 Caution	 Strict observance Please follow the fixtures' indication or specification for the distance of irradiated area. (Causes of change in shape, change in color of irradiated objects)
For electric wiring	 Warning	 Only qualified person may work on electric wiring and equipment. (Cause of accidents)
		 Use alternating current. Please follow rating plate of fixtures for power supply frequency. (Cause of electrification • fire) (50Hz • 60 Hz common use for ballasts and incandescent lamp fixtures)
		 Be sure power supply voltage is within ±6% mentioned in rating plate or the guide.(Causes of short life of lamps • electrification • fire)
		 Be sure all the wires and codes are not damaged. (Causes of falling • damage)
At lighting fixture installation	 Warning	 Please follow the fixtures' instruction or this guide to install the fixture and lamp. (Causes of falling • electrification • fire)
		 Switch off the power when installing the lamp. (Causes of electrification)
		 Do not touch the fixture when switch is on or just turn off the switch because of high temperature.
		 Do not put or cover the fixture by any cloths, papers, or insulators.(Causes of not lighting • fire)
		 Do not place any metallic or flammable objects. (Cause of electrification • fire • broken fixture)
		 Make sure to install all the parts of fixtures besides installation and mounting parts will not touch with any objects both inside and outside of ceiling such as lighting track, etc. (Causes of falling • electrification • fire)
		 Do not dismount or remodel fixtures. (Cause of electrification • fire • falling • broken fixtures)
		 Do not operate with wet hands.
	 Caution	 If you smell smoke, see smoke, or find anything unusual, please turn the switch off and ask construction companies to repair. (Cause of electrification • fire)
		 Make sure the construction will not affect any fire prevention systems such as sprinkler by heat from the fixture. (Causes for improper operation)

ModuleX





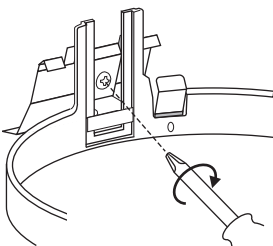




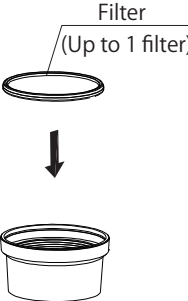
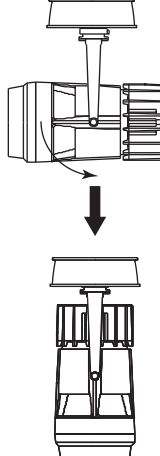


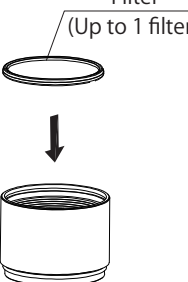


Installation Guide | Lighting Fixture

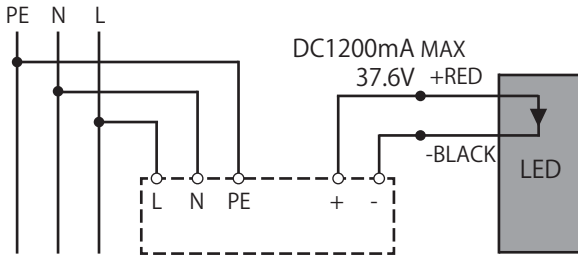

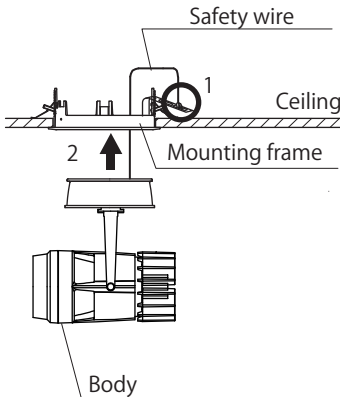
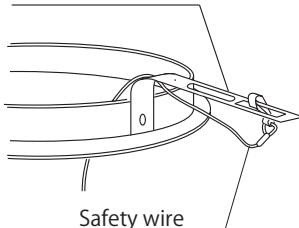
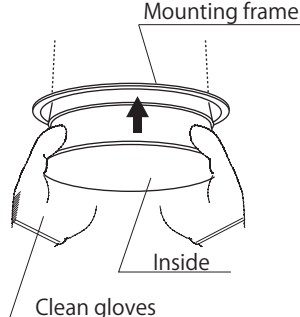
Installation Guide | Lighting Fixture

PICK UP DOWN LIHGT

To install ModuleX safety

SX-910DF/CE

Installation Details		Installation Diagram	Caution	
<p>Install the mounting equipment for ceiling cut out</p> <p>1 Cut out a hole and install the mounting frame.</p> <p>2 Slide the metal fittings from upper side.</p> <p>3 Use a screw driver and tighten the metal fittings.</p>		<p>1 Ceiling cut out</p> <p>Φ 100</p> <p>Mounting frame</p> <p>2</p> <p>Ceiling</p> <p>3</p> <p>Metal fitting</p>	<p> a</p>	<p> b</p>
<p> a</p>	<p>On step 2, please fix the metal fitting firmly with your fingers. If not, it may cause falling of fixtures.</p>		<p></p> <p>Push tight</p>	<p></p> <p>Standard to screw torque 1.0~2.0N · m</p>
<p> b</p>	<p>Make sure to tighten the metal fittings securely with a screwdriver. (torque 1.0 ~2.0 N · m) If it is loose, it may cause falling of the fixture</p>			
<p>Optional parts installation</p> <p>【Filter】</p> <p>1 Turn the hood.</p> <p>2 Put a filter in hood and put it back.</p>		<p>Body</p> <p>Filter</p> <p>(Sold separately)</p> <p>2</p> <p>Hood</p> <p>1</p>	<p> f</p>	<p> g</p>
<p> f</p>	<p>The filter sandwiches it between hood and the fixture and is put on.</p> <p>A filter, please be careful not to drop on the occasion of desorption of hood.</p>		<p></p> <p>Filter</p> <p>(Up to 1 filter)</p>	<p></p>
<p>【Snoot adapter】</p> <p>1 Turn the hood.</p> <p>2 Turn snoot adapter, and possess Hood and put it back.</p>		<p>Body</p> <p>Filter</p> <p>(Sold separately)</p> <p>2</p> <p>Snoot adapter</p> <p>(Sold separately)</p> <p>1</p> <p>Hood</p>	<p> h</p>	
<p> h</p>	<p>The filter sandwiches it between snoot adapter and the fixture and is put on.</p> <p>A snoot adapter, please be careful not to drop on the occasion of desorption of hood.</p>		<p></p> <p>Filter</p> <p>(Up to 1 filter)</p>	
<p> i</p>	<p>Turn hood and snoot adapter well, and, on the occasion of installation, please be attached to the main body.</p>			
<p> g</p>	<p>When you take off snoot adapter, please lower direction of radiation.</p>			

Installation Details		Installation Diagram	Caution	
<div>⚠</div>	Wiring connection		Wiring diagram	
	Please connect according to the description of a power supply.			
	When connecting the driver, careful attention should be paid to connecting + and -.		Driver	
<div>⚠</div>	Metal part in a cable point, please don't touch with bare hand directly.		CAUTION ! Do not reverse polarity ! 	
<div>1</div> <div>2</div> <div>⚠^k</div> <div>⚠ⁱ</div> <div>⚠</div>	Installation to ceiling		<div>⚠^k</div>	<div>⚠ⁱ</div>
	Install the safety wire to the mounting frame.			
	Install the fixture to the mounting frame.			
	Make sure to install the safety wire to the mounting frame securely.			
	Use clean soft cloth to clean up and maintain inner side of the body.			
The description of a power supply.				
Make sure the fixture will not touch any objects in ceiling.				

(Contact)
Havells Sylvania Europe Ltd.
Longbow House, 14-20 Chiswell Street, London, EC1Y 4TW, U.K
Tel : +44-01273-616649

(Manufacturer)
ModuleX Inc.
#21 AraiBldg, 1-20-6 Ebisu-Minami Shibuya-ku, Tokyo
Tel : +81-3-5768-3131