

SPECIFICATION

• Body	White(WC), Matte Black(MC), Silver(SC)
• Mounting Frame	White(W), Matte Black(M)
• Light Distribution	Narrow(N)・Medium(M)・Wide(W)
• Vertical aiming angle	100°
• Horizontal aiming angle	360°
• Dedicated Driver	Constant current (50/60Hz shared)
• Fixture Input Voltage	19. 5V
• Fixture Input Current	0. 7A (MAX)
• Weight	340g



PRODUCT CODE

SX-505/80DF/N・M・W/R24B/MC・SC/W/CE
SX-505/80DF/N・M・W/R27B/MC・SC/W/CE
SX-505/80DF/N・M・W/R30B/MC・SC/W/CE
SX-505/80DF/N・M・W/R35B/MC・SC/W/CE
SX-505/80DF/N・M・W/R40B/MC・SC/W/CE

OPTION

Full diffuser lens	MLA-080/DF01
Semi diffuser lens	MLA-080/DS03
Full spread lens	MLA-080/SF01
Semi spread lens	MLA-080/SS01
Edge control filter	MLA-080/EC02

[mm] (Terminal Dimension:φ1. 0 x length 9. 5mm)

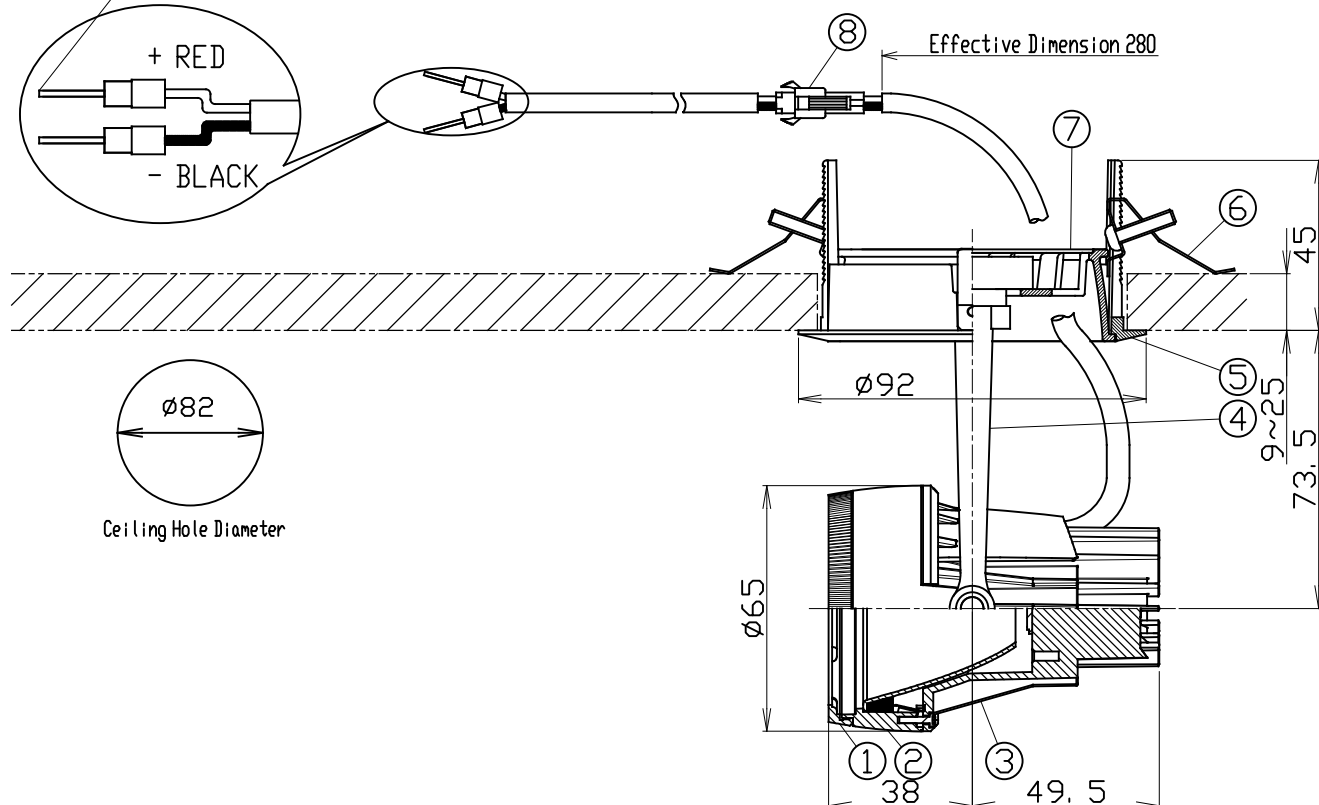

	PARTS	MATERIAL	REMARK
1	Hood	ADC	Acrylic Baking Finish
2	Body	ADC	Acrylic Baking Finish
3	Heat conductive body	ADC	Acrylic Baking Finish
4	Arm	Resin	
5	Mounting Frame	ADC	Acrylic Baking Finish
6	Unit Mounting Spring	Stainless Steel	
7	Cone	ADC	Acrylic Baking Finish
8	Safety Connector	Resin	

ATTENTION

- Use within 0℃~35℃ ambient temperature range
- Emission color and brightness would be different even within the same model.
- Danger! Do not remodel fixtures.
- Do not use fixture without hood.
- To remove heat, place an air hole when installing the fixture in a fitting.
(Place air holes equally in the upper side of the fitting. Total aperture size should be more than 5% of the fitting's surface)
- Please use constant current driver.
- Keep distance of the fixtures and objects 0. 1m or more.
- Please do not remove safety connector
- Please use the "class2" driver. In that case, grounding is not required.